



KY TYPE 108


Working Conditions

- Pumps: Centrifugal pumps, pipe pumps, ordinary industrial pumps, etc.
- Temperature: -20°C~110°C
- Pressure: $\leq 0.8\text{MPa}$
- Speed: $\leq 10\text{ m/Sec}$

Elastomer Bellow Shaft Seals

Combined Materials

- Stationary Ring (Ceramic/SiC/TC)
- Rotary Ring (Carbon/SiC/TC)
- Secondary Seal (NBR/EPDM/Viton)
- Spring and Punched Parts (Steel)

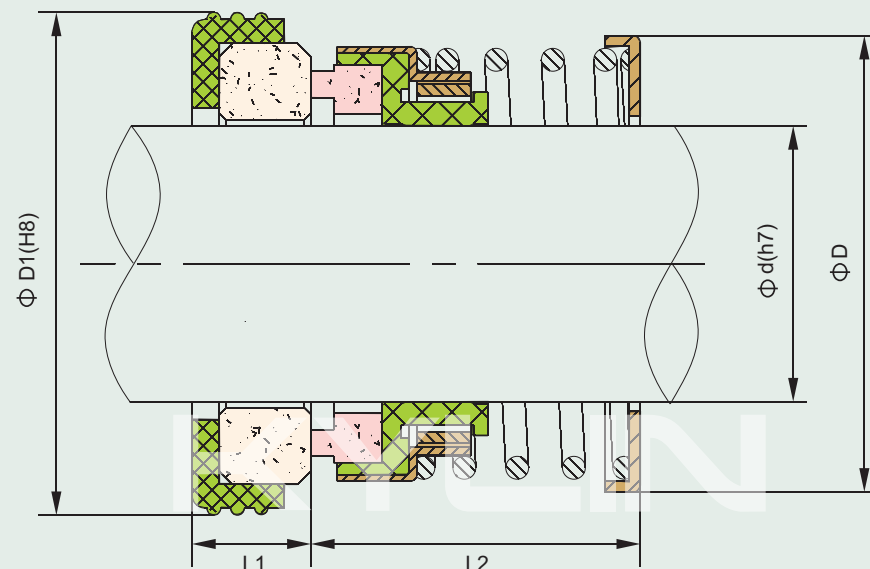

Part#	d	D	D1	L1	L2
KY TYPE 108-9	9	20	21	5	15
KY TYPE 108-10	10	20	21	5	15
KY TYPE 108-11	11	22	24	5	15
KY TYPE 108-12	12	22	26	5	15
KY TYPE 108-14	14	24.5	26	5	20
KY TYPE 108-15	15	26.5	27	5	20
KY TYPE 108-16	16	26.5	27	5	20
KY TYPE 108-17	17	32	33	5	20
KY TYPE 108-18	18	32	33	5	20
KY TYPE 108-19	19	34	35	5	20
KY TYPE 108-20	20	34	35	5	20
KY TYPE 108-22	22	36	37	6	22
KY TYPE 108-25	25	39	40	7	25
KY TYPE 108-28	28	42	43	7	28
KY TYPE 108-30	30	44	45	7	28
KY TYPE 108-35	35	49	50	8	29
KY TYPE 108-40	40	56	58	8.5	31.5
KY TYPE 108-45	45	61	63	8.5	31.5
KY TYPE 108-50	50	67	70	8.5	36.5
KY TYPE 108-55	55	72	75	8.5	36.5