

KY TYPE 155 / KY TYPE 155B

Compatibility:


- Burgmann BT-FN,
- Burgmann BT-FN.NU,
- ROTEN TYPE 3, UNITEN TYPE 3,
- AESSEAL T04, AESSEAL T04D

Working Conditions

- Pumps: Water pumps, circulation pumps, etc.
- Temperature: -20°C~200°C
- Pressure: $\leq 0.8\text{MPa}$
- Speed: $\leq 10\text{ m/Sec}$

Combined Materials

- Stationary Ring (Carbon/SiC/TC)
- Rotary Ring (Ceramic/SiC/TC)
- Secondary Seal (NBR/EPDM/Viton)
- Spring and Punched Parts (Steel)

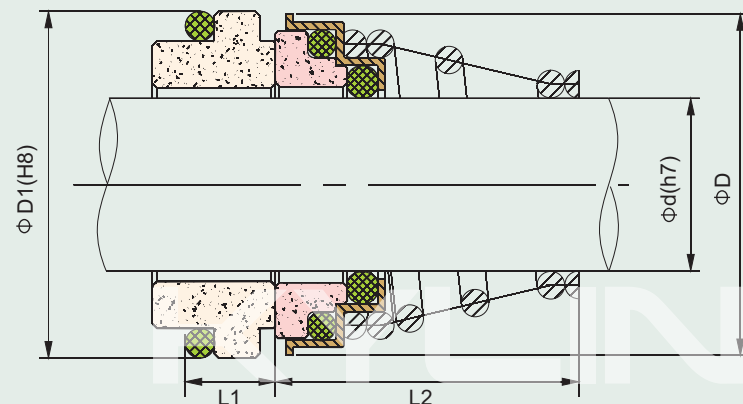

Part#	d	D	D1	L1	L2
KY TYPE 155B-10	10	20	21	7	15.2
KY TYPE 155B-12	12	22	23	7	18.2
KY TYPE 155B-14	14	25	25	7	22.2
KY TYPE 155B-16	16	29	27	7	23.2
KY TYPE 155B-18	18	33	33	10	24.2
KY TYPE 155B-20	20	33	35	10	25.2
KY TYPE 155B-22	22	38	37	10	25.2
KY TYPE 155B-24	24	38	39	10	27.2
KY TYPE 155B-25	25	40	40	10	27.2
KY TYPE 155B-28	28	46	43	10	29.2
KY TYPE 155B-30	30	46	45	10	30.2
KY TYPE 155B-32	32	46	48	10	30.2
KY TYPE 155B-33	33	48	48	10	39.2
KY TYPE 155B-35	35	50	50	10	39.2
KY TYPE 155B-38	38	56	56	13	42.2
KY TYPE 155B-40	40	58	58	13	42.2

Part#	d	D	D1	L1	L2
KY TYPE 155-10	10	20	18.1	5.5	15.2
KY TYPE 155-11	11	22	20.6	5.5	18.2
KY TYPE 155-12	12	22	20.6	5.5	18.2
KY TYPE 155-13	13	25	23.1	6	22.2
KY TYPE 155-14	14	25	23.1	6	22.2
KY TYPE 155-15	15	29	26.9	7	22.2
KY TYPE 155-16	16	29	26.9	7	23.2
KY TYPE 155-17	17	29	26.9	7	23.2
KY TYPE 155-18	18	33	30.9	8	24.2
KY TYPE 155-19	19	33	30.9	8	25.2
KY TYPE 155-20	20	33	30.9	8	25.2
KY TYPE 155-21	21	38	35.4	8	25.2
KY TYPE 155-22	22	38	35.4	8	25.2
KY TYPE 155-23	23	38	35.4	8	27.2
KY TYPE 155-24	24	38	35.4	8	27.2
KY TYPE 155-25	25	40	38.2	8.5	27.2
KY TYPE 155-28	28	46	43.3	9	29.2
KY TYPE 155-29	29	46	43.3	9	30.2
KY TYPE 155-30	30	46	43.3	9	30.2
KY TYPE 155-32	32	46	43.3	9	30.2
KY TYPE 155-33	33	48	53.5	11.5	39.2
KY TYPE 155-35	35	50	53.5	11.5	39.2
KY TYPE 155-38	38	56	60.5	11.5	39.2
KY TYPE 155-40	40	58	60.5	11.5	39.2

O Ring Mechanical Seals