




**KY TYPE 16**

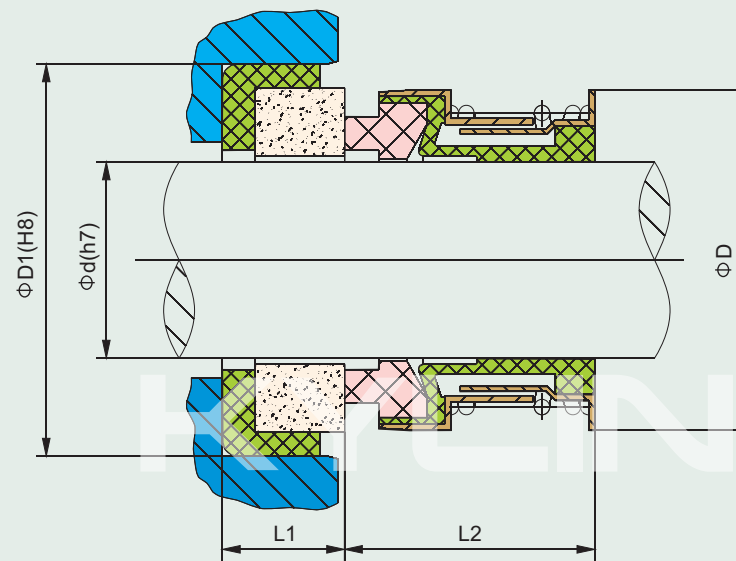

Part#	d	D	D1	L1	L2
KY TYPE 16-3/8"A	9.53	23.29	22.23	6.35	16.08
KY TYPE 16-3/8"	9.53	23.29	22.23	7.14	16.86
KY TYPE 16-1/2"A	12.7	23.29	25.4	6.35	16.86
KY TYPE 16-1/2"	12.7	23.29	25.4	7.93	16.86
KY TYPE 16-5/8"	15.88	30.1	31.75	10.3	18.44
KY TYPE 16-3/4"	19.05	33.07	34.93	10.3	18.44
KY TYPE 16-7/8"	22.23	36.3	38.1	10.3	20.82
KY TYPE 16-1"	25.4	39.42	41.28	11.1	20.82

## Elastomer Bellows Shaft Seals

### Combined Materials

- Stationary Ring (Ceramic/SiC/TC)
- Rotary Ring (Carbon/SiC/TC)
- Secondary Seal (NBR/EPDM/Viton)
- Spring and Punched Part (Steel)

### Compatibility:

- PAC-SEAL TYPE 16, John Crane TYPE 6, US SEAL TYPE A, SEALOL TYPE 6

### Working Conditions

- Mediums: Water, oil and weakly-corrosive mediums.
- Temperature: -20°C~200°C
- Pressure:  $\leq 0.6\text{MPa}$
- Speed:  $\leq 10\text{ m/Sec}$

▪ Add: No. 7 Mingshu Road, Jiangshan Town, Ningbo, Zhejiang, China, 315191

▪ Tel: +86-134-56162828

▪ +86-138-67856735

▪ Email: sales@kyltd.com