




**KY TYPE 216**

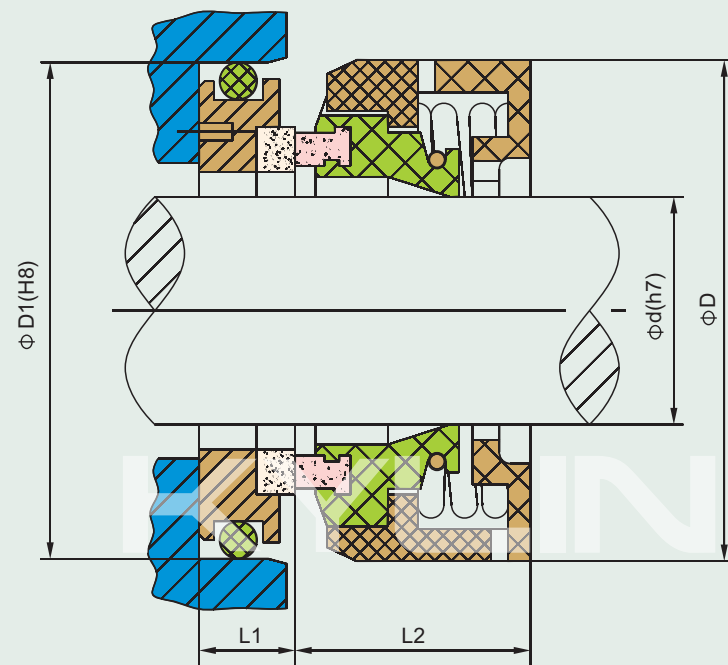

Part#	d	D	D1	L1	L2
KY TYPE 216-20	20	42.5	55.5	11	25.7
KY TYPE 216-22	22	47	45.5	9	23.8
KY TYPE 216-25	25	54	50.5	10	28.8
KY TYPE 216-28	28	54	50.5	10	28.8
KY TYPE 216-30	30	54	50.5	10	28.8
KY TYPE 216-35	35	62	60.5	11	29

## Elastomer Bellow Shaft Seals

### Combined Materials

- Stationary Ring (SiC/TC)
- Rotary Ring (SiC/TC)
- Secondary Seal (NBR/EPDM/Viton)
- Spring and Retainer (Steel and plastic or Cast Aluminum Alloy.)

### Working Conditions

- Mediums: Water, oil and weakly-corrosive mediums.
- Temperature: -20°C~200°C
- Pressure:  $\leq 0.5\text{MPa}$
- Speed:  $\leq 5\text{ m/Sec}$

▪ Add: No. 7 Mingshu Road, Jiangshan Town, Ningbo, Zhejiang, China, 315191

▪ Tel: +86-134-56162828

▪ +86-138-67856735

▪ Email: sales@kyltd.com