


KY TYPE 250



Compatibility:

- EagleBurgmann Ha211

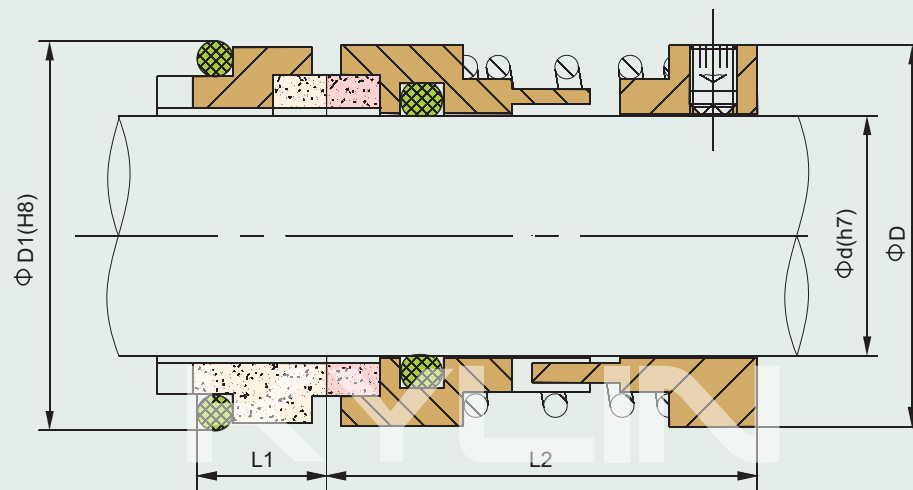

Combined Materials

- Stationary Ring (Carbon/Ceramic/SiC/TC)
- Rotary Ring (Carbon/SiC/TC)
- Secondary Seal (NBR/EPDM/Viton)
- Spring and Metal Part (Steel)

Working Conditions

- Mediums: Water, oil, weak acid, weak alkali, etc.
- Temperature: $-20^{\circ}\text{C} \sim 180^{\circ}\text{C}$
- Pressure: $\leq 1.2\text{MPa}$
- Speed: $\leq 16\text{m/Sec}$

Part#	d	D	D1	L1	L2
KY TYPE 250-20	20	34	35	13	41
KY TYPE 250-22	22	36	37	13	41
KY TYPE 250-24	24	38	39	13	43
KY TYPE 250-25	25	39	40	13	43
KY TYPE 250-28	28	42	43	13	45
KY TYPE 250-30	30	44	45	13	45
KY TYPE 250-33	33	47	48	13	45
KY TYPE 250-35	35	49	50	13	49
KY TYPE 250-38	38	54	56	13	53
KY TYPE 250-40	40	56	58	13	55
KY TYPE 250-43	43	59	61	13	55
KY TYPE 250-45	45	61	63	13	55
KY TYPE 250-48	48	64	66	13	55
KY TYPE 250-50	50	66	68	13	60
KY TYPE 250-53	53	69	71	13	61
KY TYPE 250-55	55	71	73	13	61
KY TYPE 250-58	58	76	79	16	63
KY TYPE 250-60	60	78	81	16	63
KY TYPE 250-63	63	81	84	16	63
KY TYPE 250-65	65	83	86	16	67
KY TYPE 250-70	70	90	92	16	68
KY TYPE 250-75	75	95	97	16	72
KY TYPE 250-80	80	100	105	16	72
KY TYPE 250-85	85	105	110	16	77

O Ring Mechanical Seals