


KY HJ92N / KY HJ977GN



Combined Materials

- Stationary Ring (Ceramic/SiC/TC)
- Rotary Ring (Carbon/SiC/TC)
- Secondary Seal(NBR/EPDM/Viton)
- Spring and Metal Part (Steel)

O Ring Mechanical Seals

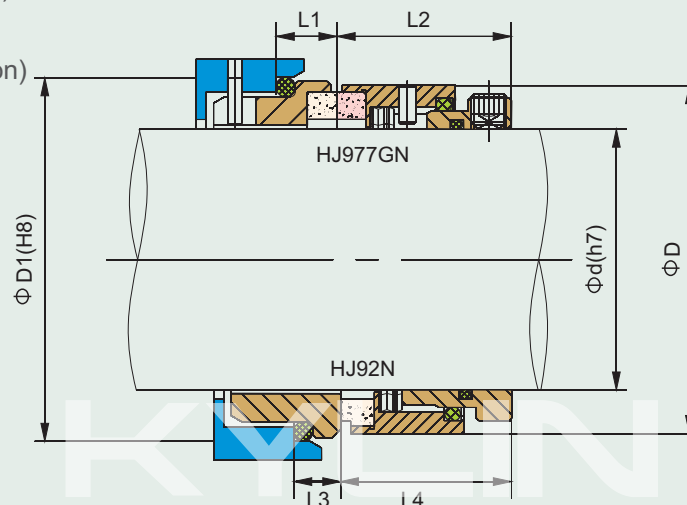

Compatibility:

- Burgmann HJ92N / HJ977GN

Working Conditions

- Mediums: Pulp and paper, sugar, and sewage disposal, etc.
- Temperature: -20°C~200°C
- Pressure: $\leq 2.5\text{MPa}$
- Speed: $\leq 15\text{m/Sec}$

Part#	d	D	D1	L1	L2	L3	L4
KY HJ92N / HJ977GN-18	18	32	33	9	28.7	7	30.7
KY HJ92N / HJ977GN-20	20	34	35	9	28.7	7	30.7
KY HJ92N / HJ977GN-22	22	36	37	9	28.7	7	30.7
KY HJ92N / HJ977GN-24	24	38	39	9	31.2	7	33.2
KY HJ92N / HJ977GN-25	25	39	40	9	31.2	7	33.2
KY HJ92N / HJ977GN-28	28	42	43	9.5	33.2	7	35.7
KY HJ92N / HJ977GN-30	30	44	45	9.5	33.2	7	35.7
KY HJ92N / HJ977GN-32	32	47	48	9.5	33.2	7	35.7
KY HJ92N / HJ977GN-33	33	47	48	9.5	33.2	7	35.7
KY HJ92N / HJ977GN-35	35	49	50	9.5	33.2	7	35.7
KY HJ92N / HJ977GN-38	38	54	56	10.5	34.7	8	37.2
KY HJ92N / HJ977GN-40	40	56	58	10.5	34.7	8	37.2
KY HJ92N / HJ977GN-43	43	59	61	10.5	34.7	8	37.2
KY HJ92N / HJ977GN-45	45	61	63	10.5	34.7	8	37.2
KY HJ92N / HJ977GN-48	48	64	66	10.5	34.7	8	37.2
KY HJ92N / HJ977GN-50	50	66	70	12	35.7	9.5	38.2
KY HJ92N / HJ977GN-53	53	69	73	12	35.7	9.5	38.2
KY HJ92N / HJ977GN-55	55	71	75	12	35.7	9.5	38.2
KY HJ92N / HJ977GN-58	58	78	78	13	39.7	10.5	42.2
KY HJ92N / HJ977GN-60	60	80	80	13	39.7	10.5	42.2
KY HJ92N / HJ977GN-63	63	83	83	13	39.7	10.5	42.2
KY HJ92N / HJ977GN-65	65	85	85	13	39.7	10.5	42.2
KY HJ92N / HJ977GN-68	68	88	90	13.5	39.2	11	41.7
KY HJ92N / HJ977GN-70	70	90	92	14	46.2	11.5	48.7
KY HJ92N / HJ977GN-75	75	99	97	14	46.2	11.5	48.7
KY HJ92N / HJ977GN-80	80	104	105	14	46.2	11.5	48.7
KY HJ92N / HJ977GN-85	85	109	110	14	46.2	11.5	48.7
KY HJ92N / HJ977GN-90	90	114	115	15.5	49.7	13	52.2
KY HJ92N / HJ977GN-95	95	119	120	15.5	49.7	13	52.2
KY HJ92N / HJ977GN-100	100	124	125	15.5	49.7	13	52.2