



Combined Materials

- Stationary Ring(Carbon/SiC)
- Rotary Ring (Ceramic/SiC)
- Secondary Seal (NBR/EPDM/Viton)
- Spring and Punched Parts (Steel)


KY TYPE FB

Compatibility:

- Trisun TSFB

Working Conditions

- Mediums: Water, oil, and weakly-corrosive mediums, etc.
- Temperature: -20°C~100°C
- Pressure: $\leq 0.3\text{MPa}$
- Speed: $\leq 10\text{ m/Sec}$

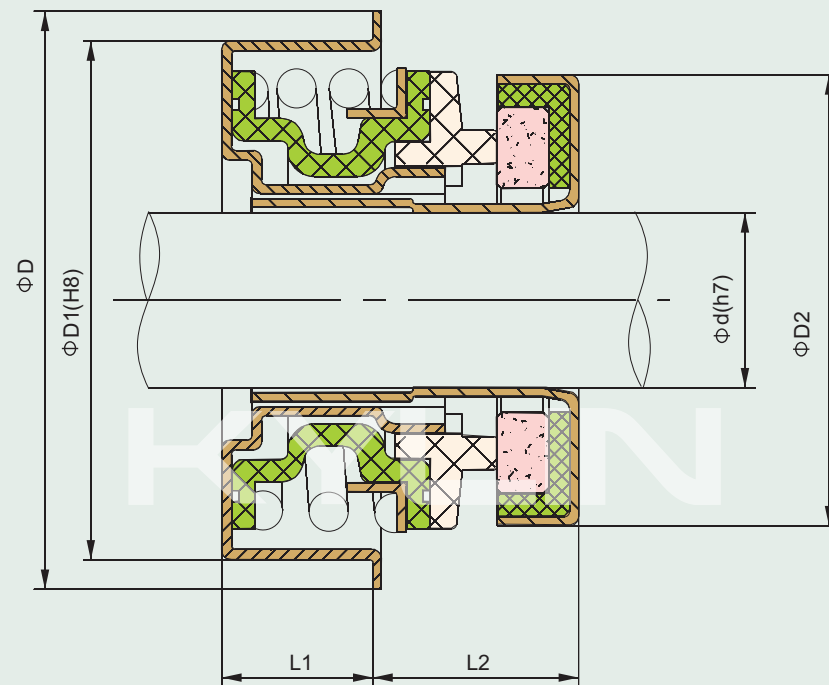

Part#	d	D	D1	D2	L1	L2
KY TYPE FB-12	12	35	30	25	8	9.7
KY TYPE FB-12A	12	38.5	33.4	25	6.7	11
KY TYPE FB-12B	12	32	28.55	25	8	9.7
KY TYPE FB-13	13	35	30	25	8	9.7
KY TYPE FB-15	15	41.5	36.45	30	8	11.2
KY TYPE FB-5/8"	15.875	41.5	34.2	30	5.6	12.25
KY TYPE FB-5/8" A	15.875	41.5	36.45	30	8	11.2
KY TYPE FB-5/8" B	15.875	41.5	38.1	30	8	11.2
KY TYPE FB-16	16	41.5	36.45	32.5	8	11.2
KY TYPE FB-16A	16	41.5	38.1	32.5	8	11.2
KY TYPE FB-20	20	43.8	38	37	9.5	12.5
KY TYPE FB-20A	20	43.8	40	37	9.5	12.5

Automotive Pump Seals