



Combined Materials


- Stationary Ring (Ceramic/SiC/TC)
- Rotary Ring (Carbon/SiC/TC)
- Secondary Seal (NBR/EPDM/Viton)
- Spring and Punched Parts (Steel)

Working Conditions

- Pumps: Submersible pumps, sewage pumps.
Applied to the muddy water, sewage water or weakly corrosive fluids with solid grains.
- Temperature: -20°C~100°C
- Pressure: $\leq 0.5\text{MPa}$
- Speed: $\leq 8\text{ m/Sec}$

KY UU4701

Part#	d	D	D1	L1
KY UU4701-16	16	27	27	36
KY UU4701-18	18	33	33	36
KY UU4701-20	20	35	35	49
KY UU4701-22	22	37	37	49
KY UU4701-24	24	39	39	49
KY UU4701-25	25	40	40	51
KY UU4701-28	28	43	43	51
KY UU4701-30	30	45	45	59
KY UU4701-32	32	48	48	61
KY UU4701-33	33	48	48	61
KY UU4701-35	35	50	50	61
KY UU4701-38	38	56	56	61
KY UU4701-40	40	58	58	64.5
KY UU4701-43	43	61	61	65
KY UU4701-45	45	63	63	65
KY UU4701-48	48	66	66	65
KY UU4701-50	50	70	70	69.5
KY UU4701-53	53	73	73	69.5
KY UU4701-55	55	75	75	71

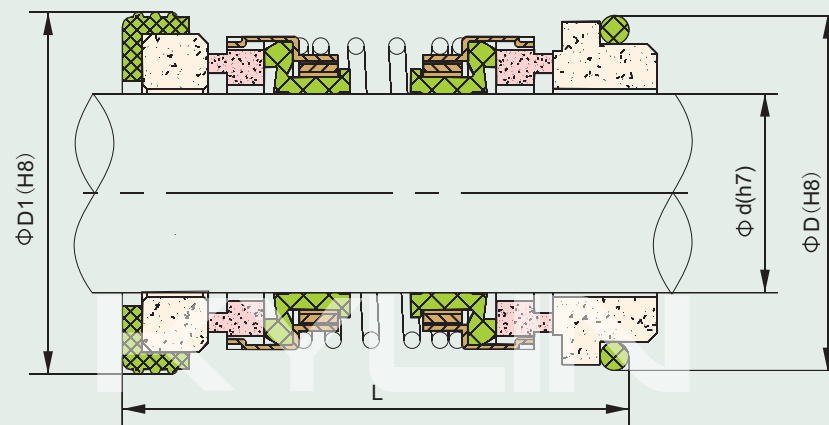

Double Mechanical Seals